




Kono Bollard

External lighting



Architectural bollard in three heights with symmetric or asymmetric LED light. Suitable for pathways, gardens, driveways or landscape areas.

Construction: Extruded aluminium shaft with die cast aluminium head. Internal LED Driver. IP65, IK10.

Lens: UV resistant polycarbonate - extra clear.

Installation: Flanged, with Anchor Bolts.

Finish: Light Grey as standard. Anthracite Grey on request.

LED: 15W to 30W LED. 4000K as standard, 3000K or 2700K on request.

Driver: Internal, 220-240V AC 50/60 Hz.


Options: Different Heights, Symmetric (360°) Or Asymmetric (180°), different finishes available.

Manufactured: EU.

Product Compliance: EN 60598, CE.

Veelite

DIMENSIONS

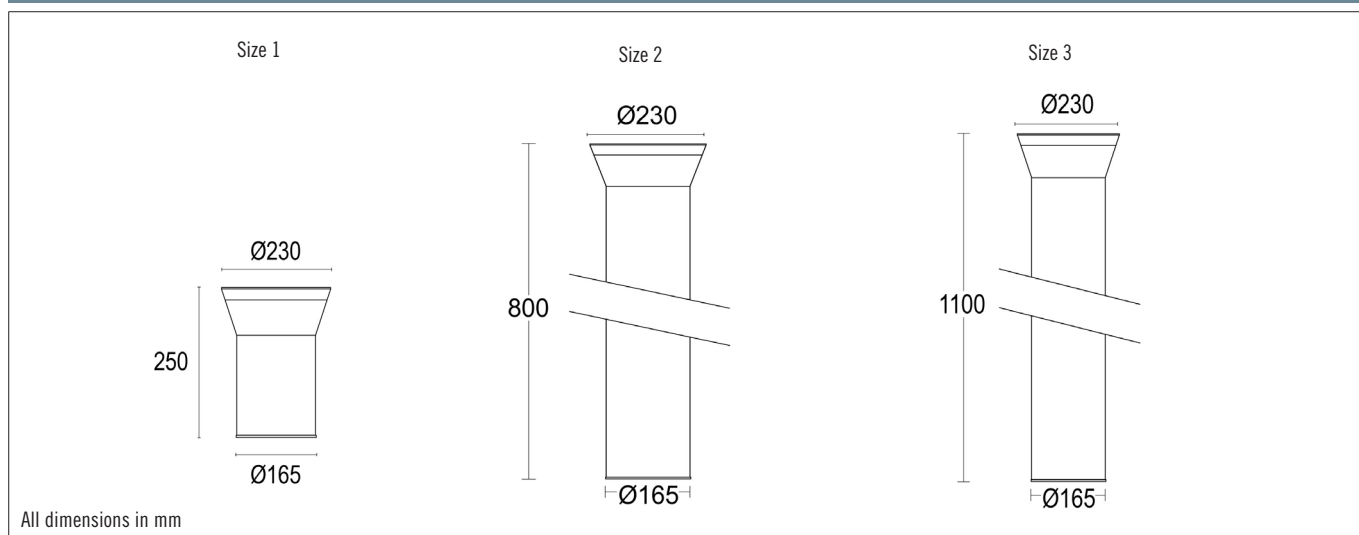

ORDERING CODE

Wattage	Type	Code	Beam°	Size	Details	+J Bolts	Lumens*
15W	LED	G0973.FAXT400	180°	1	Kono Bollard 4000K, Flanged	GAC254	2208 lm
21W	LED	G0970.FGXT400	360°	1	Kono Bollard 4000K, Flanged	GAC254	3155 lm
30W	LED	G0970.FNXT400	360°	1	Kono Bollard 4000K, Flanged	GAC254	4416 lm
15W	LED	G0974.FAXT400	180°	2	Kono Bollard 4000K, Flanged	GAC254	2208 lm
21W	LED	G0971.FGXT400	360°	2	Kono Bollard 4000K, Flanged	GAC254	3155 lm
30W	LED	G0971.FNXT400	360°	2	Kono Bollard 4000K, Flanged	GAC254	4416 lm
15W	LED	G0975.FAXT400	180°	3	Kono Bollard 4000K, Flanged	GAC254	2208 lm
21W	LED	G0972.FGXT400	360°	3	Kono Bollard 4000K, Flanged	GAC254	3155 lm
30W	LED	G0972.FNXT400	360°	3	Kono Bollard 4000K, Flanged	GAC254	4416 lm

* Source Lumens.

OPTIONS

.05: Anthracite Grey Finish
.19: Light Grey Finish
27K: 2700K Warm White
3K: 3000K Warm White
DALI: DALI Dimming

180° Beam

